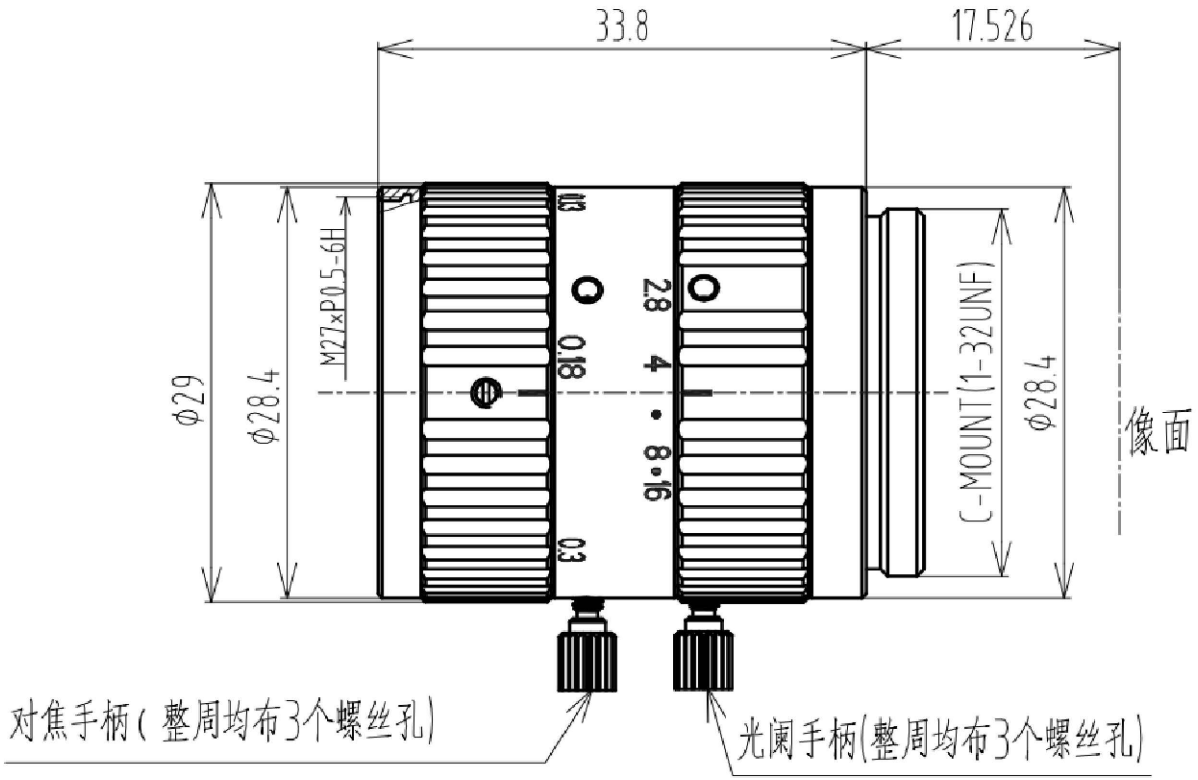


| Specification | | | | |
|---|---|---|---|---|
| Focal Length | | f=25mm | | |
| F/NO | | F2.8~F16 | | |
| Image Size | | 2/3"(8.8X6.6mm) | 1/2"(6.4X4.8mm) | 1/3"(4.8X3.6mm) |
| Angle FOV | H | 20° | 14.9° | 11.4° |
| | V | 15.3° | 11.4° | 8.8° |
| | D | 24.6° | 18.3° | 14° |
| Distortion(TV) | | <0.1% | <0.1% | <0.1% |
| Focus distance(min) | | 0.1m | | |
| Flange back | | 17.526mm in air | | |
| Back focus | | 14.3mm(min) | | |
| Filter screw size | | M27xP0.5 | | |
| Front/Rear Effective Dia | | Front Ø15mm Rear Ø10.3mm | | |
| Mount | | C Mount | | |
| Temperature | | -10~+50°C | | |
| Storage Temperature Range | | -20~+60°C | | |

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | YIXIAN SENSE 易图特感 | | | 图面名称 | 25mm工业镜头规格书 | | |
| | | | | | | | | 机种名称 | FA2528D03 | | |
| | | | | | 绘 图 | | | 材 料 | / | 版 本 | V0 |
| | | | | | 校 对 | | | 表面处理 | / | 比 例 | 1:1 |
| | | | | | 审 核 | | | 单 位 | mm | 页 次 | 1/1 |
| 标记 | 处数 | 变更内容/原因 | 担当 | 变更日期 | 批 准 | | | 视 图 | | | A4 |