


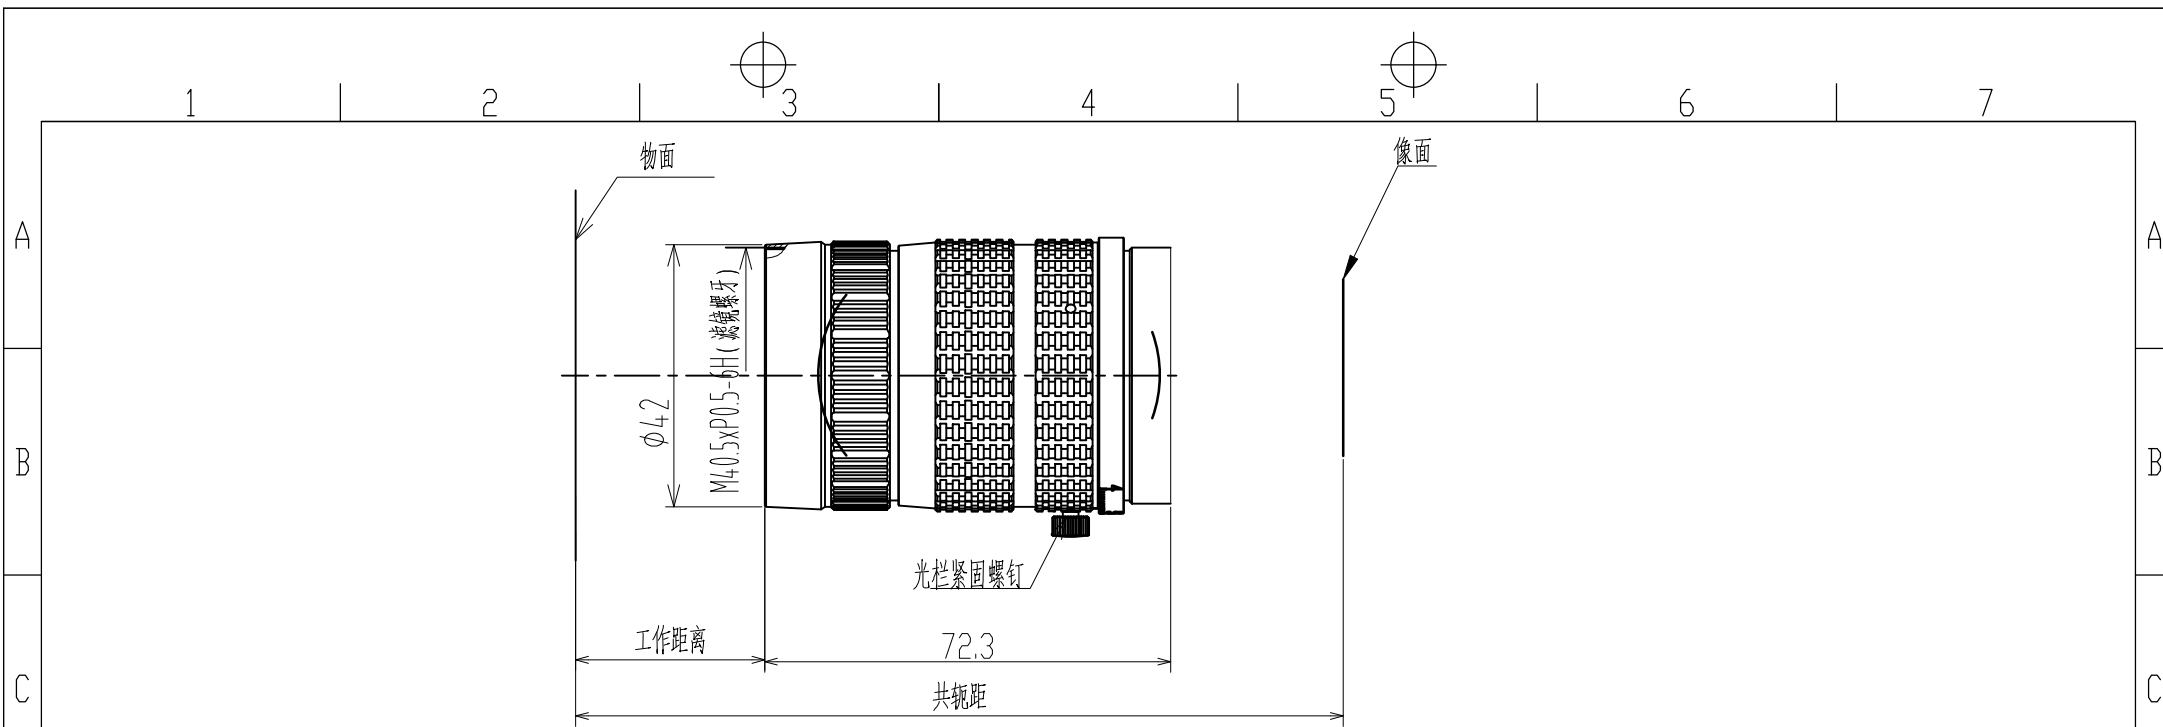

	Specification			
D	Magnification	-0.125X	-0.15X	-0.175X
	Working Distance	187±5	154±5	130±5
	Image Distance	/	/	/
	Conjugate Distance	279.2±9	246.8±9	223.4±9
	Flange Focal Distance			
E	Max Image	ø32		
	F/#	4.0~16		
	EFL	25		
	FOV	59°		
	ENP Diameter	6.2		
F	Distortion	<0.1%		
	Structure	6G		
	Image Quality			
	Axis	ø16	ø21	ø32
	125lp/mm	125lp/mm	100lp/mm	80lp/mm

倍率	共轭距	工作距	Φ14视场	Φ28视场	Φ32视场
0.125x	279.2	187	112.0	224.0	256.0
0.13x	271.3	179	107.7	215.4	246.2
0.135x	264.9	172	103.7	207.4	237.0
0.14x	258.5	166	100.0	200.0	228.6
0.145x	252.7	160	96.6	193.1	220.7
0.15x	246.8	154	93.3	186.7	213.3
0.155x	241.4	148.5	90.3	180.6	206.5
0.16x	237	144	87.5	175.0	200.0
0.17x	228	135	82.4	164.7	188.2
0.175x	223.4	130	80.0	160.0	182.9

					 YIXIAN SENSE 易 显 传 感			图面名称	镜头规格书		
								机种名称	LS2540H0.15A		
					绘 图			材 料	/	版 本	V0
					校 对			表面处理	/	比 例	1:1
					审 核			单 位	mm	页 次	1/1
标记	处数	变更内容/原因	担当	变更日期	批 准			视 图			A4