


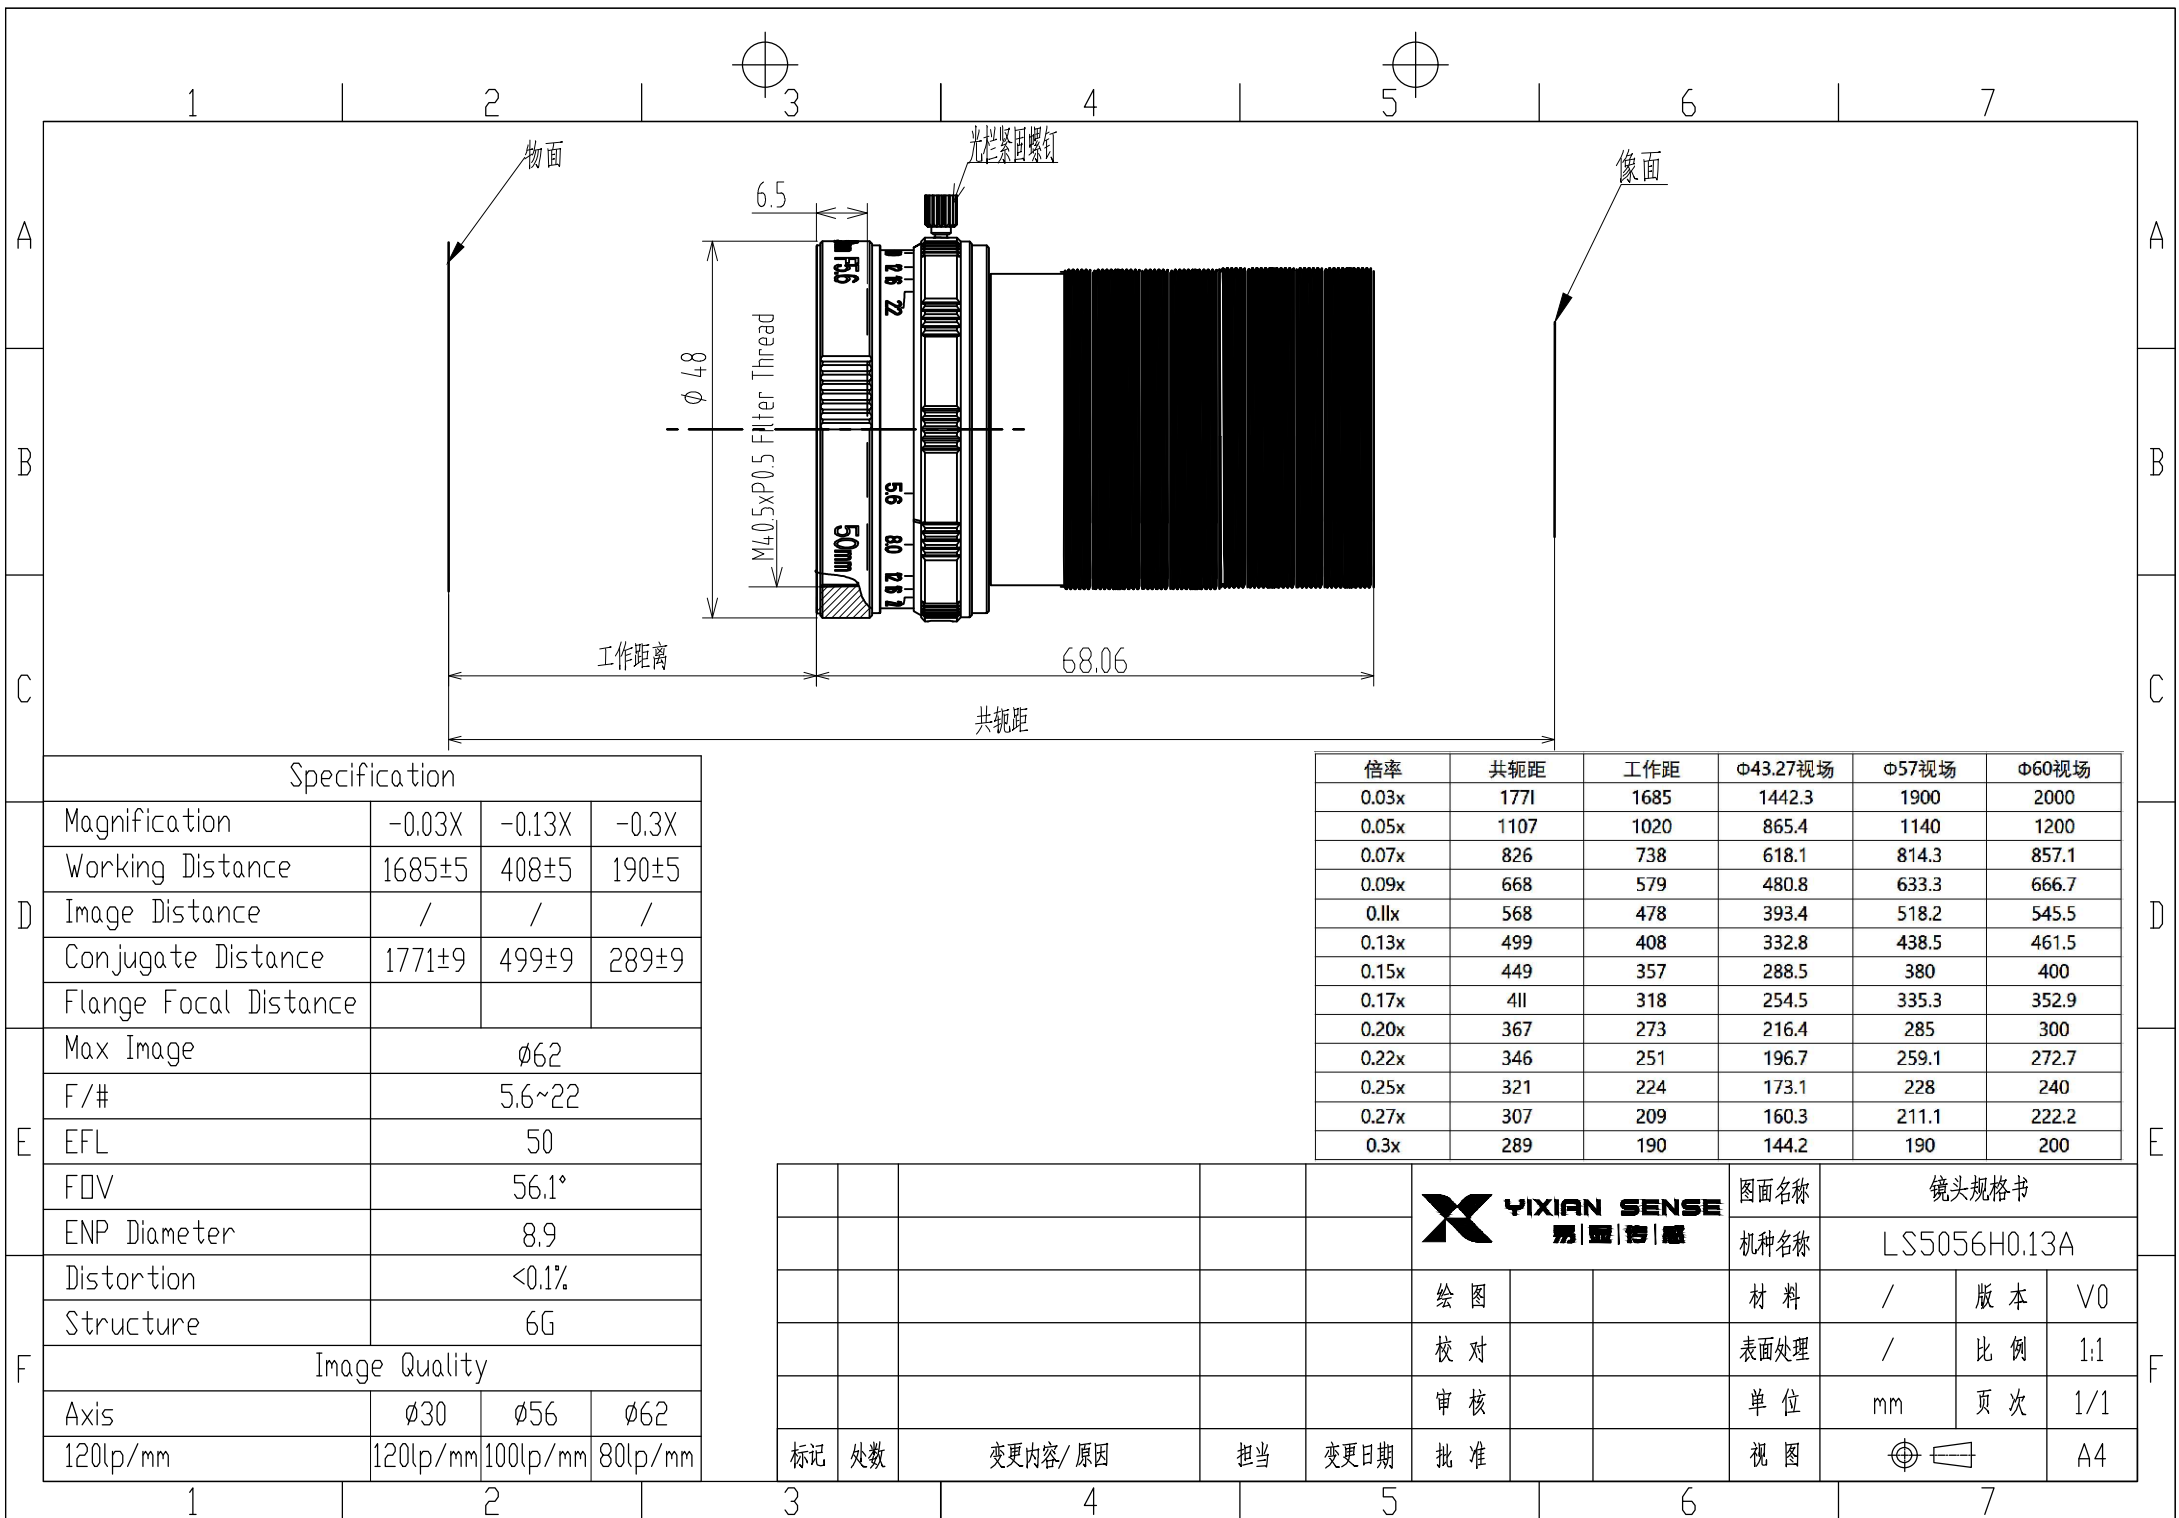

	Specification			
D	Magnification	-0.03X	-0.13X	-0.3X
	Working Distance	1685±5	408±5	190±5
	Image Distance	/	/	/
	Conjugate Distance	1771±9	499±9	289±9
	Flange Focal Distance			
E	Max Image	ø62		
	F/#	5.6~22		
	EFL	50		
	FOV	56.1°		
	ENP Diameter	8.9		
F	Distortion	<0.1%		
	Structure	6G		
	Image Quality			
	Axis	ø30	ø56	ø62
	120lp/mm	120lp/mm	100lp/mm	80lp/mm

倍率	共轭距	工作距	ø43.27视场	ø57视场	ø60视场
0.03x	1771	1685	1442.3	1900	2000
0.05x	1107	1020	865.4	1140	1200
0.07x	826	738	618.1	814.3	857.1
0.09x	668	579	480.8	633.3	666.7
0.11x	568	478	393.4	518.2	545.5
0.13x	499	408	332.8	438.5	461.5
0.15x	449	357	288.5	380	400
0.17x	411	318	254.5	335.3	352.9
0.20x	367	273	216.4	285	300
0.22x	346	251	196.7	259.1	272.7
0.25x	321	224	173.1	228	240
0.27x	307	209	160.3	211.1	222.2
0.3x	289	190	144.2	190	200

								图面名称	镜头规格书		
										机种名称	LS5056H0.13A
					绘 图			材 料	/	版 本	V0
					校 对			表面处理	/	比 例	1:1
					审 核			单 位	mm	页 次	1/1
标记	处数	变更内容/原因	担当	变更日期	批 准			视 图			A4