


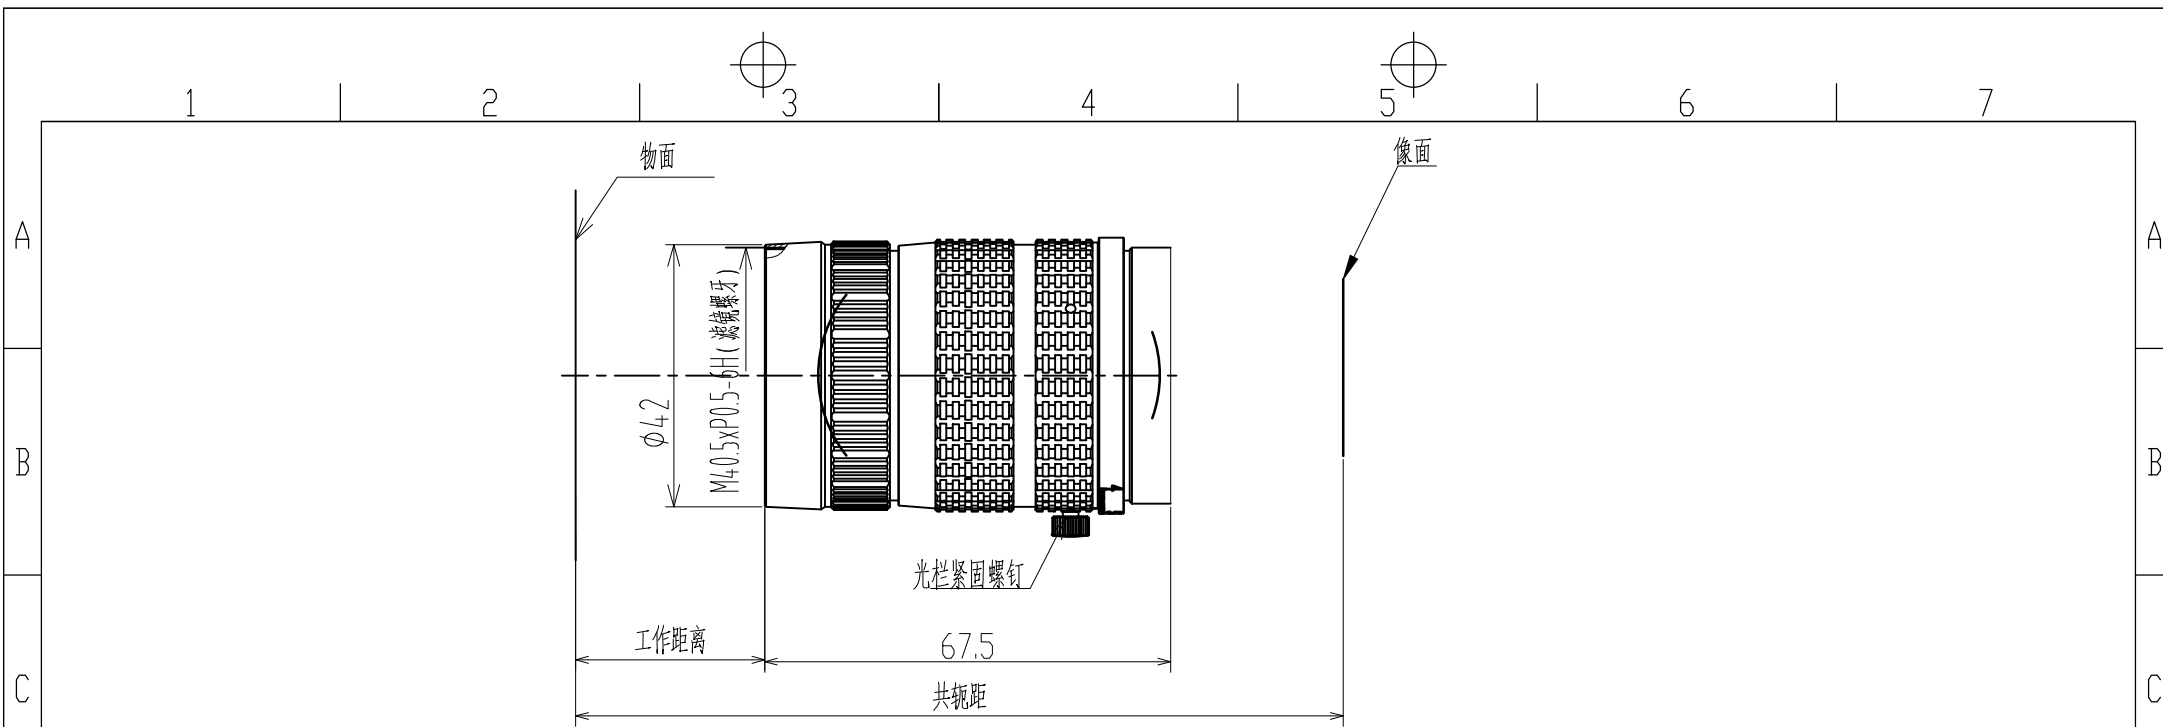

	Specification			
D	Magnification	-0.05X	-0.085X	-0.12X
	Working Distance	511±5	298±5	209±5
	Image Distance	/	/	/
	Conjugate Distance	597±9	385±9	297±9
	Flange Focal Distance			
E	Max Image	ø32		
	F/#	4.0~16		
	EFL	25		
	FOV	57.3°		
	ENP Diameter	6.2		
F	Distortion	<0.1%		
	Structure	6G		
	Image Quality			
	Axis	ø16	ø21	ø32
	125lp/mm	125lp/mm	100lp/mm	80lp/mm

倍率	共轭距	工作距	Φ14视场	Φ28视场	Φ32视场
0.05x	597	511	280.0	560.0	640.0
0.06x	511	425	233.3	466.7	533.3
0.07x	450	364	200.0	400.0	457.1
0.08x	404	317	175.0	350.0	400.0
0.085x	385	298	164.7	329.4	376.5
0.09x	368	281	155.6	311.1	355.6
0.1x	338	251	140.0	280.0	320.0
0.11x	315	228	127.3	254.5	290.9
0.12x	297	209	116.7	233.3	266.7

					 YIXIAN SENSE 易 显 感			图面名称	镜头规格书		
								机种名称	LS2540H0.085A		
					绘 图			材 料	/	版 本	V0
					校 对			表面处理	/	比 例	1:1
					审 核			单 位	mm	页 次	1/1
标记	处数	变更内容/原因	担当	变更日期	批 准			视 图			A4