


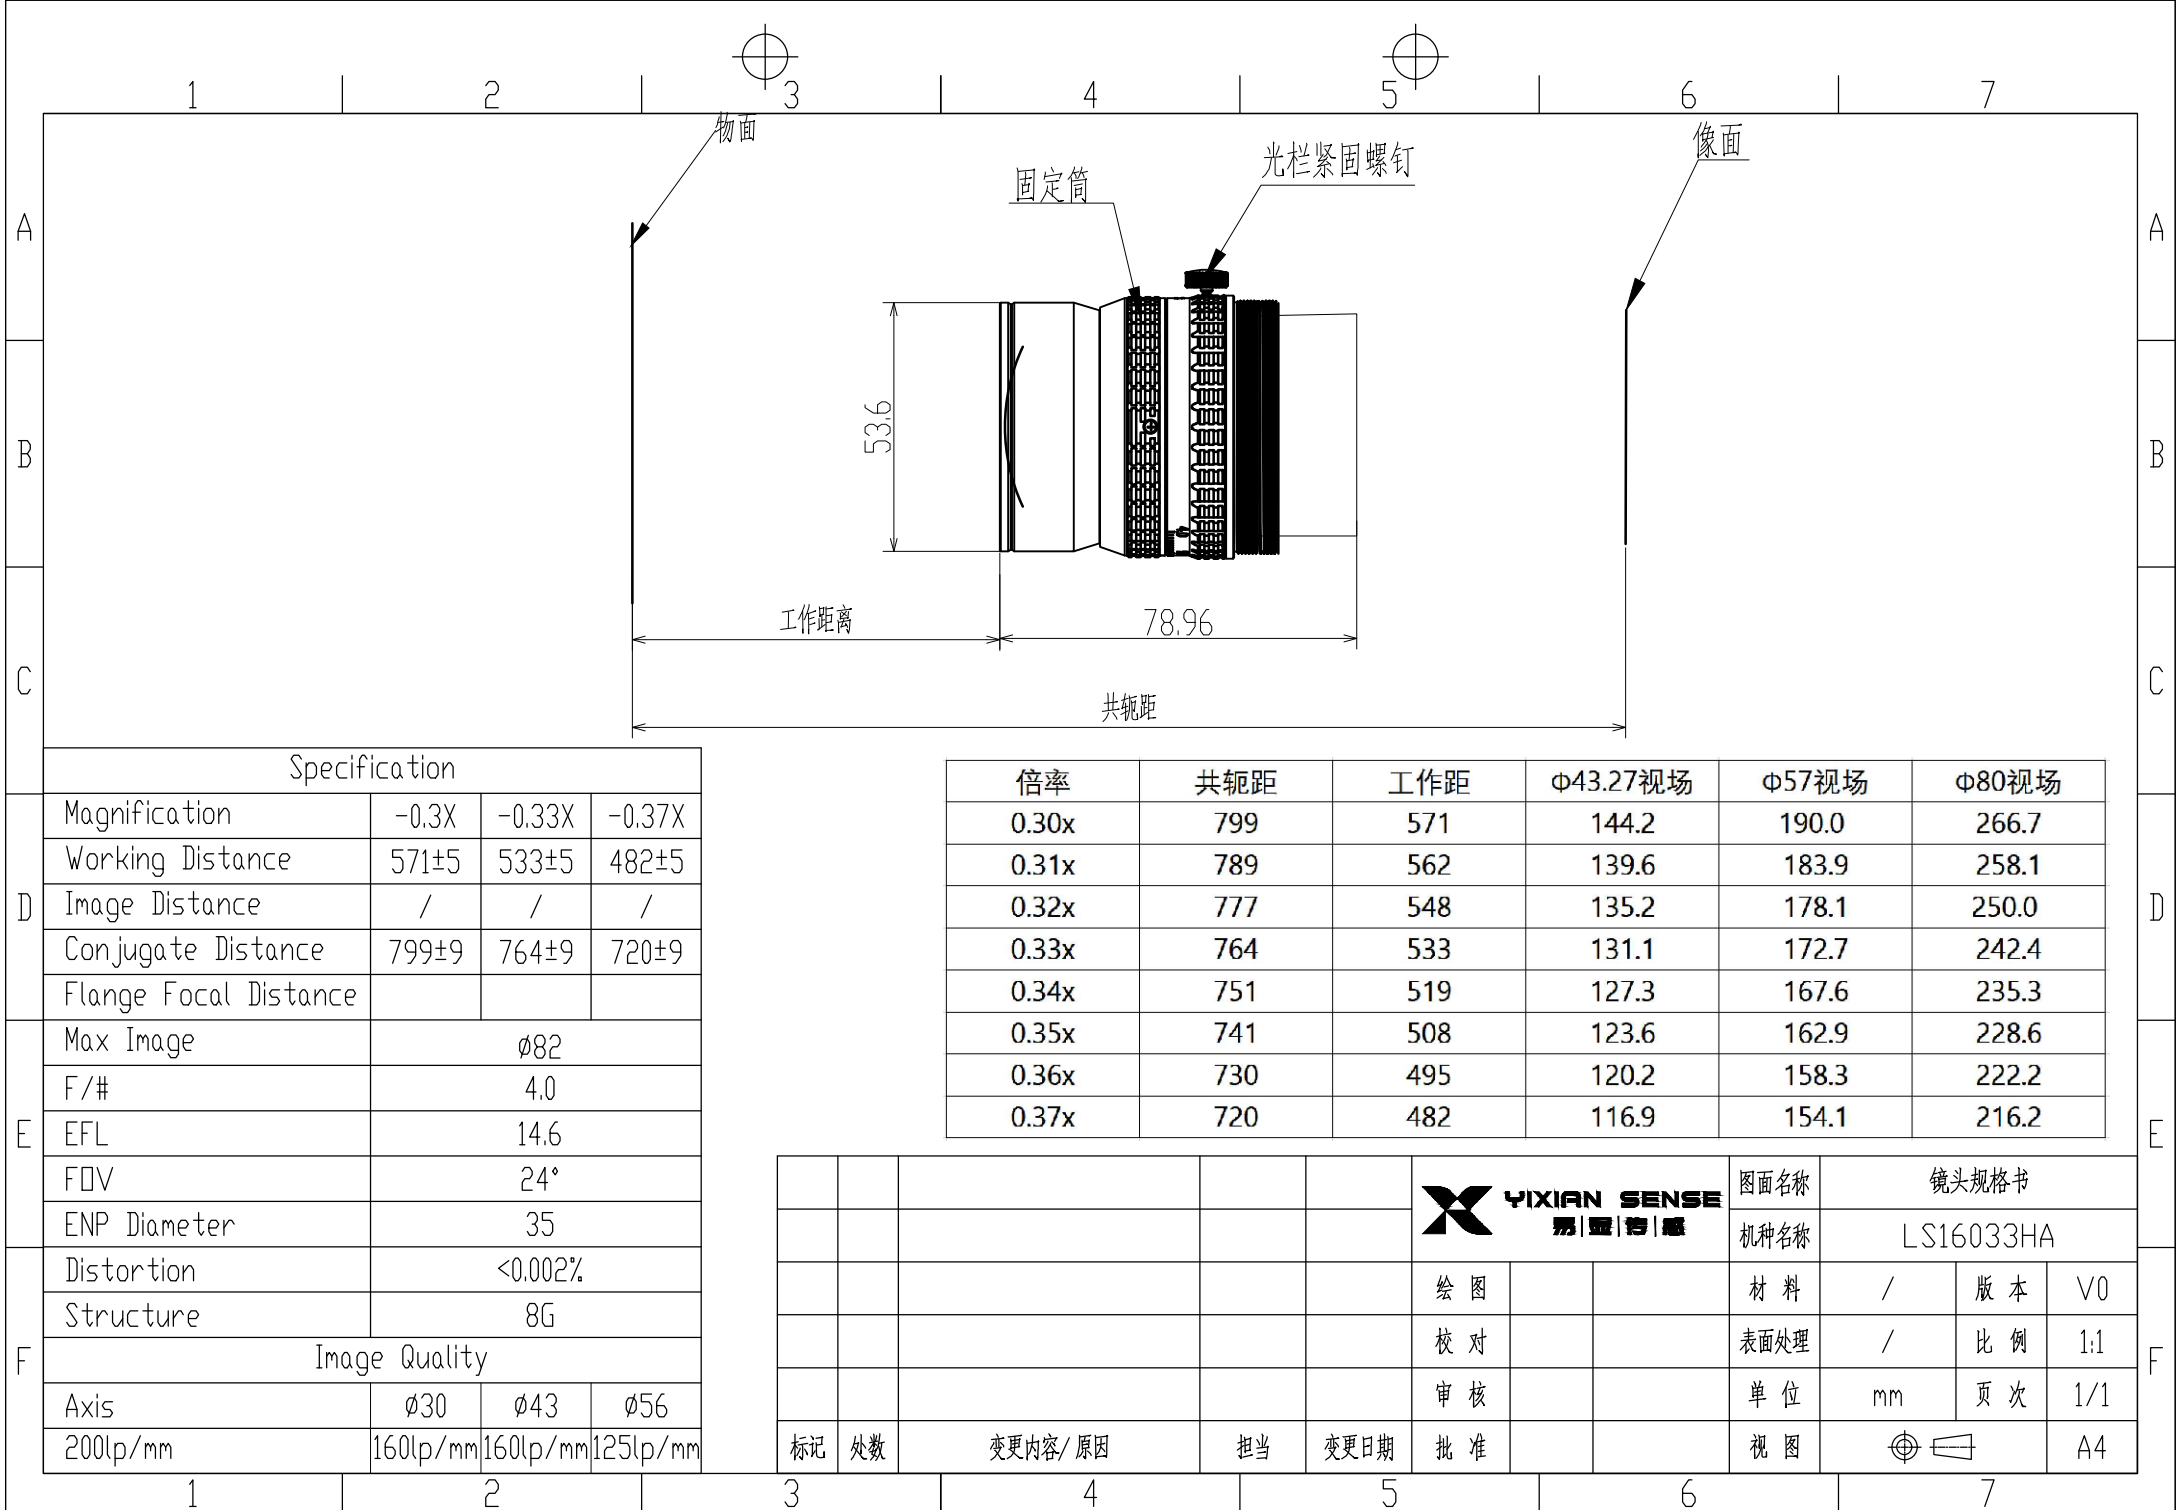

	Specification			
D	Magnification	-0.3X	-0.33X	-0.37X
	Working Distance	571±5	533±5	482±5
	Image Distance	/	/	/
	Conjugate Distance	799±9	764±9	720±9
	Flange Focal Distance			
E	Max Image	ø82		
	F/#	4.0		
	EFL	14.6		
	FOV	24°		
	ENP Diameter	35		
F	Distortion	<0.002%		
	Structure	8G		
	Image Quality			
	Axis	ø30	ø43	ø56
	200lp/mm	160lp/mm	160lp/mm	125lp/mm

倍率	共轭距	工作距	φ43.27视场	φ57视场	φ80视场
0.30x	799	571	144.2	190.0	266.7
0.31x	789	562	139.6	183.9	258.1
0.32x	777	548	135.2	178.1	250.0
0.33x	764	533	131.1	172.7	242.4
0.34x	751	519	127.3	167.6	235.3
0.35x	741	508	123.6	162.9	228.6
0.36x	730	495	120.2	158.3	222.2
0.37x	720	482	116.9	154.1	216.2

					 YIXIAN SENSE 易 壹 智 感			图面名称	镜头规格书		
										机种名称	LS16033HA
					绘 图			材 料	/	版 本	V0
					校 对			表面处理	/	比 例	1:1
					审 核			单 位	mm	页 次	1/1
标记	处数	变更内容/原因	担当	变更日期	批 准			视 图			A4