



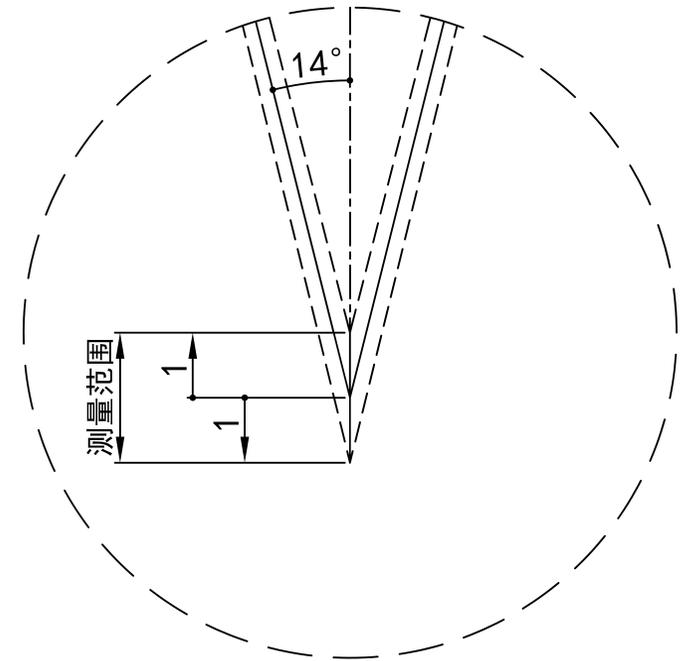

CL050R020产品参数

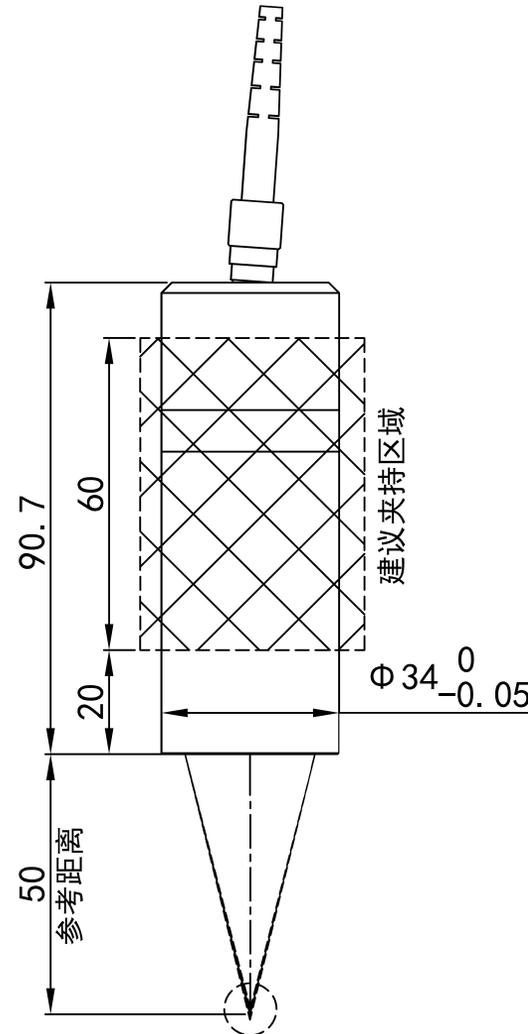

参考距离* ¹	50 mm
测量范围	± 1 mm
测量角度* ²	$\pm 14^\circ$
光斑直径* ³	$\Phi 20/40/320 \mu\text{m}$
重复精度* ⁴	85 nm
线性误差* ⁵	$< \pm 0.6 \mu\text{m}$
外径*长度	$\phi 34 * 90.7$ mm
重量	162 g
最小可测厚度	10% of F.S.
温度特征	$\approx 0.1\% \text{ F.S./}^\circ\text{C}$
防护等级	IP40